



HF-Performer III for TL-D lamps

HF-P 118/136 TL-D III 220-240V 50/60 Hz

HF-Performer III TLD is a sustainable, slim and high-frequency electronic ballast for TL-D fluorescent lamps. It is ideal for applications where high energy efficiency is required. The HF-Performer III range has a robust design, meets all relevant international safety and performance standards and is energy-efficient (CELMA EEI A2).

Product data

| General Information | |
|--|------------------|
| Application code | III |
| Type version | IDC |
| Lamp type | TL-D |
| Number of lamps | 1 piece/unit |
| Number of products on MCB (16 A type B) (nom.) | 28 |
| Automatic restart | Yes |
| Operating and Electrical | |
| Input voltage | 220 to 240 V |
| Input frequency | 50 to 60 Hz |
| Operating frequency (nom.) | 45 kHz |
| Ignition method | Programmed Start |
| Crest factor (max.) | 1.7 |
| Power factor 100% load (nom.) | 0.99 |
| Ignition time (max.) | 0.9 s |
| Mains voltage performance (AC) | -8%~+6% |
| Mains voltage safety (AC) | -10%~+10% |
| Earth leakage current (nom.) | 0.5 mA |

| Inrush current width | 0.25 ms |
|---|--|
| Constant wattage deviation | -2%/+2% |
| Ballast factor (nom.) | 1 |
| Power losses (nom.) | 2.5-4.1 W |
| Inrush current peak (max.) | 18 A |
| Wiring | |
| Connector type input terminals | WAGO 251 universal connector [Suitable for both automatic wiring (ALF and ADS) and manual wiring] |
| Cable capacity output wires mutual (nom.) | 200 pF |
| Connector type output terminals | WAGO 251 universal connector [Suitable for both automatic wiring (ALF and ADS) and manual wiring] |
| Cable length hot-wiring | 0.75 m |
| Wire strip length | 8.0-9.0 mm |
| Dual fixture master/slave | Not applicable [Master/Slave oper. not applicable] |
| Input terminal cross section | 0.50-1.00 mm ² |
| Output terminal cross section | 0.50-1.00 mm ² |

HF-Performer III for TL-D lamps

| | |
|---|--------|
| Cable capacity output wires to earth (nom.) | 200 pF |
|---|--------|

System characteristics

| | |
|--------------------------|-------------|
| Rated ballast-lamp power | 36/18 W |
| Rated lamp power on TL-D | 36/18 W |
| System power on TL-D | 35.2/19.1 W |
| Lamp power on TL-D | 31.1/16.6 W |
| Power loss on TL-D | 4.1/2.5 W |
| Rated lamp power on PL-L | 36 W |
| System power on PL-L | 34.6 W |
| Lamp power on PL-L | 30.7 W |
| Power loss on PL-L | 3.9 W |

Temperature

| | |
|------------------------|--------|
| T ambient (max.) | 60 °C |
| T ambient (min.) | -25 °C |
| T storage (max.) | 50 °C |
| T storage (min.) | -40 °C |
| T case lifetime (nom.) | 80 °C |
| T-Case maximum (max.) | 80 °C |
| T-Ignition (max.) | 60 °C |
| T-Ignition (min.) | -25 °C |

Mechanical and Housing

| | |
|---------|-------------|
| Housing | L 280x30x28 |
|---------|-------------|

Emergency Operation

| | |
|--|--------------|
| Nominal light output after 60 seconds | 100% of EBLF |
| Battery voltage lamp ignition | 186-275 V |
| Normal operating voltage (DC) | 220-240 V |
| Battery voltage lamp operation | 186-275 |
| Battery voltage guaranteed operation | 176-275 V |
| Battery voltage guaranteed ignition | 186-275 V |
| Emergency ballast lumen factor (EBLF) (nom.) | 100 % |

| | |
|--------------------------------------|-------------|
| Nominal light output after 5 seconds | 50% of EBLF |
|--------------------------------------|-------------|


Approval and Application

| | |
|------------------------------------|---|
| Energy efficiency index | A2 BAT |
| IP classification | IP 20 [Ingress Protection 20] |
| EMI 9 kHz... 30 MHz | EN55015 |
| EMI 30 MHz... 1,000 MHz | EN55022 level B |
| Safety standard | IEC 61347-2-3 |
| Performance standard | IEC 60929 |
| Quality standard | ISO 9000:2000 |
| Environmental standard | ISO 14001 |
| Harmonic current emission standard | IEC 61000-3-2 |
| EMC immunity standard | IEC 61547 |
| Vibration standard | IEC68-2-6 F c |
| Bumps standard | IEC 68-2-29 Eb |
| Humidity standard | EN 61347-2-3 clause 11 |
| Approval marks | CE marking ENEC certificate VDE-EMV certificate |
| Temperature marking | Yes |
| Emergency standard | IEC 60598-2-22 |
| Humming and noise level | < 30 dB(A) |

Product Data

| | |
|---------------------------------|---|
| Full product code | 872790091164000 |
| Order product name | HF-P 118/136 TL-D III 220-240V 50/60 Hz |
| EAN/UPC – product | 8711500999641 |
| Order code | 91164000 |
| Local Code | HFP136TLDIII |
| Numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 12 |
| Material no. (12NC) | 913713031566 |
| Net weight (piece) | 0.202 kg |

Dimensional drawing

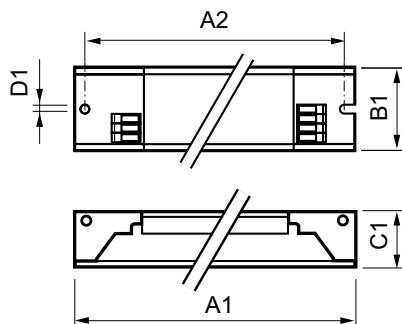

HF-P 118/136 TL-D III 220-240V 50/60Hz

| Product | D1 | C1 | A1 | A2 | B1 |
|--|--------|---------|----------|----------|---------|
| HF-P 118/136 TL-D III 220-240V 50/60 Hz | 4.2 mm | 28.0 mm | 280.0 mm | 265.0 mm | 30.0 mm |

HF-Performer III for TL-D lamps

