



# Premium LED candles & lusters - Dimmable and features

### MAS LEDlustre DT 6-40W E27 P48 CL

Create a warm, inviting ambiance with the Philips dimmable Premium LED candles. The Philips LED WarmGlow candles offer a new experience for dimmable LEDs, by enabling light levels to dim to the warm tones of traditional lamps. You can change the ambiance from functional lighting to an inviting and cozy atmosphere.

### **Product data**

General Information			
Cap-Base	E27 [ E27]		
Nominal Lifetime (Nom)	25000 h		
Switching Cycle	50000X		
Technical Type	6-40W		
Light Technical			
Color Code	822-827 [ tunable warm white]		
Luminous Flux (Nom)	470 lm		
Luminous Flux (Rated) (Nom)	470 lm		
Color Designation	Warm White (WW)		
Correlated Color Temperature (Nom)	2200-2700 K		
Luminous Efficacy (Rated) (Nom)	75 lm/W		
Color Consistency	<6		
Color Rendering Index (Nom)	80		
LLMF At End Of Nominal Lifetime (Nom)	70 %		

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	6 W
Lamp Current (Nom)	35 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	instant full light
Power Factor (Nom)	0.7
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	95 °C
Controls and Dimming	
Dimmable	Yes

Datasheet, 2018, February 27 data subject to change

# Premium LED candles & lusters - Dimmable and features


Mechanical and Housing		
Bulb Finish	Clear	
Approval and Application		
Suitable For Accent Lighting	No	
Energy Efficiency Label (EEL)	A+	
Energy Consumption kWh/1000 h	6 kWh	

871869645360500

Order product name	MAS LEDlustre DT 6-40W E27 P48 CL
EAN/UPC - Product	8718696453605
Order code	929001140702
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001140702
Net Weight (Piece)	0.072 kg


# **Dimensional drawing**

Full product code




Product	D	С
MAS LEDIustre DT 6-40W E27 P48 CL	48 mm	93 mm

### Photometric data





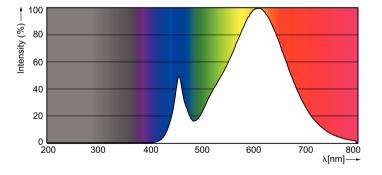

Lightcolor /827

# Premium LED candles & lusters - Dimmable and features

