

Product information sheet

LED Strip Set 3M 4000K

Bailey nr.: 141962


EAN-code: 8714681419625

Type of light source

Lighting technology used	LED
Cap type	Plug
Non-directional or directional	DLS
Mains or non-mains	NMLS
Connected light source (CLS)	No
Colour-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Dimmable	Yes

Specifications

Energy consumption in on-mode (KWh/1000h)	7
Energy Efficiency Class	E
Useful luminous flux (use) in lm	750
Beam angle correspondence	Wide cone (120°)
Correlated colour temperature (K)	4000
On-mode power (Pon) in W	6,8
Standby power (Psb) in W	0,00
Networked standby power for CLS (Pnet) in W	-
Colour rendering index	80
Outer dimension (Height) in mm	100
Outer dimensions (Width) in mm	10
Outer dimensions (Depth) in mm	1
Claim of equivalent power	No
Equivalent power (W)	-
Chromaticity coordinate (x)	0,380
Chromaticity coordinate (y)	0,380
Peak luminous intensity (cd)	200
Beam angle (°)	110
R9 Colour rendering index	0
Survival factor	0,90
Lumen maintenance factor	0,93
Displacement factor	N/A
Colour consistency in McAdam ellipses	N/A
Claim CFL-ni	No
Replacement claim (W)	-
Flicker metric	N/A
Stroboscopic effect metric	N/A
Lifetime L70B50 (h)	15000
Nominal voltage (V)	230-12
Voltage type	Adapter
Frequency	-

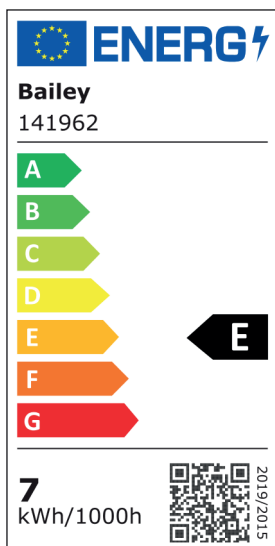

Specific precautions

Scalable to 50CM 3.4W
415lm

Spectral power distribution

