

Product information sheet


LED AR70 Ba15d 12V DIM 8W (50W) 610lm 827 35D

Bailey nr.: 143325

EAN-code: 8714681433256

Type of light source

Lighting technology used	LED
Cap type	Ba15d
Non-directional or directional	DLS
Mains or non-mains	NMLS
Connected light source (CLS)	No
Colour-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Dimmable	Yes

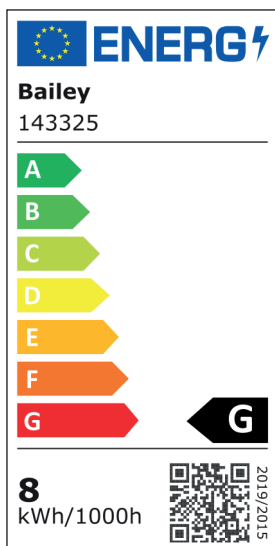

Specifications

Energy consumption in on-mode (KWh/1000h)	8
Energy Efficiency Class	G
Useful luminous flux (use) in lm	610
Beam angle correspondence	Narrow cone (90°)
Correlated colour temperature (K)	2700
On-mode power (Pon) in W	8,0
Standby power (Psb) in W	0,00
Networked standby power for CLS (Pnet) in W	-
Colour rendering index	80
Outer dimension (Height) in mm	51
Outer dimensions (Width) in mm	70
Outer dimensions (Depth) in mm	-
Claim of equivalent power	No
Equivalent power (W)	-
Chromaticity coordinate (x)	0,456
Chromaticity coordinate (y)	0,409
Peak luminous intensity (cd)	2300
Beam angle (°)	35
R9 Colour rendering index	6
Survival factor	1,00
Lumen maintenance factor	0,96
Displacement factor	N/A
Colour consistency in McAdam ellipses	N/A
Claim CFL-ni	No
Replacement claim (W)	-
Flicker metric	N/A
Stroboscopic effect metric	N/A
Lifetime L70B50 (h)	30000
Nominal voltage (V)	12
Voltage type	AC/DC
Frequency	-

Specific precautions

N/A

Spectral power distribution

