

## Product information sheet

### LED G6.35 10V-30V DC 3W (32W) 350lm 830

Bailey nr.: 80100035230


EAN-code: 8714681352304

#### Type of light source

Lighting technology used	LED
Cap type	G6.35
Non-directional or directional	NDLS
Mains or non-mains	NMLS
Connected light source (CLS)	No
Colour-tuneable light source	No
Envelope	No
High luminance light source	No
Anti-glare shield	No
Dimmable	No

#### Specifications

Energy consumption in on-mode (KWh/1000h)	3
Energy Efficiency Class	F
Useful luminous flux (use) in lm	350
Beam angle correspondence	Sphere (360°)
Correlated colour temperature (K)	3000
On-mode power (Pon) in W	3,0
Standby power (Psb) in W	0,00
Networked standby power for CLS (Pnet) in W	-
Colour rendering index	80
Outer dimension (Height) in mm	35
Outer dimensions (Width) in mm	19
Outer dimensions (Depth) in mm	-
Claim of equivalent power	Yes
Equivalent power (W)	32
Chromaticity coordinate (x)	0,439
Chromaticity coordinate (y)	0,405
Peak luminous intensity (cd)	N/A
Beam angle (°)	300
R9 Colour rendering index	8
Survival factor	0,90
Lumen maintenance factor	0,92
Displacement factor	N/A
Colour consistency in McAdam ellipses	N/A
Claim CFL-ni	No
Replacement claim (W)	-
Flicker metric	N/A
Stroboscopic effect metric	N/A
Lifetime L70B50 (h)	10000
Nominal voltage (V)	10-30
Voltage type	DC
Frequency	12V AC/DC

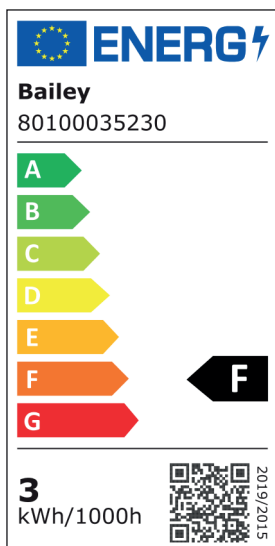

Specific precautions

N/A

Spectral power distribution

