

## QTi 1X35/49/80 GII

QUICKTRONIC INTELLIGENT | ECG for FL 16 mm



### Product family features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Lamp start with optimum filament preheating
- Lifetime: > 100,000 h (for T = 65 °C at T<sub>2</sub>)
- Energy Efficiency Index EEI: A2 BAT
- Automatic shutdown of defective lamps and at end of life (EoL T.2)
- Safety: to EN 61347-2-3
- Lamp operation: to EN 60929

### Product family benefits

- Long lamp life
- No adverse effect from frequent on/off switching
- Automatic restart after lamp replacement
- Perfect lamp start for applications with motion sensors
- VDE/VDE EMC certified system
- Very high energy efficiency due to cut-off technology

### Areas of application

- Emergency lighting systems acc. to EN 50172 / DIN VDE 0108-100
- Industry
- Open-plan offices, corridors and storage rooms
- Public buildings
- Sports halls and factories
- Strip lighting
- Suitable for emergency lighting (DC operation)
- Modernization of existing systems
- Suitable for luminaires of protection classes I and II

# Product datasheet

## Technical data

### Electrical data

Input voltage AC	198...264 V
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Input voltage DC	176...276 V
Operating frequency	42...85 kHz
Max. ECG no. on circuit breaker 10 A (B)	8 <sup>1)</sup>
Max. ECG no. on circuit breaker 16 A (B)	13 <sup>1)</sup>
Inrush current	53 A


<sup>1)</sup> Type B

### Light technical data

Starting time	1.0 s <sup>1)</sup>
---------------	---------------------

<sup>1)</sup> If there is a temporary interruption in the power supply (< 0.5 s), the lamp will start within 0.3 s

### Dimensions & weight

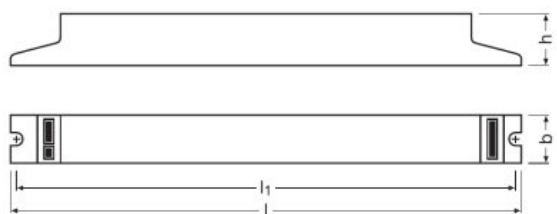

Length	360.0 mm
Width	30.0 mm
Height	21.0 mm
Mounting hole spacing, length	350.0 mm
Product weight	240.00 g

### Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Permitted rel. humidity during operation	5...85 % <sup>1)</sup>

<sup>1)</sup> Maximum 56 days/year at 85 %

## Product datasheet

### Lifespan

ECG lifetime	100000 h <sup>1)</sup>
--------------	------------------------

<sup>1)</sup> At  $T_{case} = 65^{\circ}\text{C}$  at  $T_{point}$  / 10% failure rate

### Expected Lifetime

Product name	Lamp group				
QTi 1X35/49/80 GII	HE 35 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	45	55	65
		Lifetime [h]	100000	100000	100000
	HO 49 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	50	55	65
		Lifetime [h]	100000	100000	100000
	HO 80 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	50	55	70
		Lifetime [h]	100000	100000	60000

### Additional product data

Suitable for lamp power (1 lamp)	35...80 W
----------------------------------	-----------

### Capabilities

Suitable for fixtures with prot. class	I / II
End of lamp life safety shutdown	EOL T.2
Max. cable length to lamp/LED module	2.0 m / 1.0 m
Dimmable	No

### Certificates & standards

Approval marks – approval	VDE / VDE-EMC / ENEC 10 / CE
EEI – Energy Label	A2 BAT
Standards	Acc. to EN 61347-2-3/Acc. to EN 60929/Acc. to EN 55015:2006 + A1:2007/Acc. to EN 61000-3-2/Acc. to EN 61547
Protection class	II
Type of protection	IP20


### Logistical data

Commodity code	850410809000
----------------	--------------



## Product datasheet

---

	Declarations of conformity Quicktronic CE 3364256 090421
	CAD data 3-dim 321772_QTi GII
	CAD data 3-dim 321773_QTi GII
	CAD data PDF 321774_QTi GII

---

---

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321383372	QTi 1X35/49/80 GII	Shipping carton box 20	392 mm x 98 mm x 165 mm	6.34 dm <sup>3</sup>	5019.99 g

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

— Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## QTi 1X35/49/80 GII

QUICKTRONIC INTELLIGENT | ECG for FL 16 mm

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Power factor $\lambda$ [PIM]	Luminous flux at 35 °C	Number of lighting outlets
QTi 1X35/49/80 GII	DULUX L 28 W HE	0.14 A	31.00 W	0.95	2700 lm	1
	DULUX L 55 W	0.26 A	59.00 W	0.99	4800 lm	1
	DULUX L 80 W	0.38 A	85.00 W	0.98	6000 lm	1
	FC 55 W	0.26 A	59.00 W	0.99	4200 lm	1
	HE 13 W ES	0.07 A	15.00 W	0.91 c	1150 lm	1
	HE 14 W	0.08 A	16.00 W	0.93 c	1275 lm	1
	HE 19 W ES	0.10 A	22.00 W	0.94 c	1800 lm	1
	HE 21 W	0.11 A	25.00 W	0.99	1900 lm	1
	HE 28 W	0.15 A	33.00 W	0.99	2700 lm	1
	HE 32 W ES	0.16 A	36.00 W	0.96	3150 lm	1
	HE 35 W	0.17 A	38.00 W	0.97	3300 lm	1
	HE 35 W XT	0.17 A	38.00 W	0.97	3300 lm	1
	HO 45 W ES	0.21 A	48.00 W	0.97	4300 lm	1
	HO 49 W	0.24 A	53.00 W	0.97	4300 lm	1
	HO 80 W	0.38 A	85.00 W	0.98	6150 lm	1
	HO 80 W XT	0.38 A	85.00 W	0.98	6150 lm	1