

## QTP-OPTIMAL 1X18...40

QUICKTRONIC PROFESSIONAL OPTIMAL | ECG for FL and CFL, not dimmable



### Product family features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Lamp start with optimum filament preheating
- Lifetime: up to 100,000 h (temperature at  $T_c = 65$  °C, max. 10 % failure rate)
- Energy Efficiency Index EEI: A2 BAT
- Automatic shutdown of defective lamps and at end of life (EoL T.2)
- Safety: to EN 61347-2-3
- Lamp operation: to EN 60929

### Product family benefits

- Long lamp life
- No adverse effect from frequent on/off switching
- Automatic restart after lamp replacement
- Perfect lamp start for applications with motion sensors
- VDE/VDE EMC certified system
- Very high energy efficiency due to cut-off technology

### Areas of application

- Emergency lighting systems acc. to EN 50172 / DIN VDE 0108-100
- Industry
- Open-plan offices, corridors and storage rooms
- Public buildings
- Sports halls and factories
- Strip lighting
- Suitable for emergency lighting (DC operation)
- Modernization of existing systems
- Suitable for luminaires of protection classes I and II

# Product datasheet

## Technical data

### Electrical data

Input voltage AC	198...264 V
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Input voltage DC	176...276 V
Operating frequency	40...50 kHz
Max. ECG no. on circuit breaker 10 A (B)	17 <sup>1)</sup>
Max. ECG no. on circuit breaker 16 A (B)	28 <sup>1)</sup>
Inrush current	24 A


<sup>1)</sup> Type B

### Light technical data

Starting time	1.5 s <sup>1)</sup>
---------------	---------------------

<sup>1)</sup> If there is a temporary interruption in the power supply (< 0.5 s), the lamp will start within 0.3 s

### Dimensions & weight

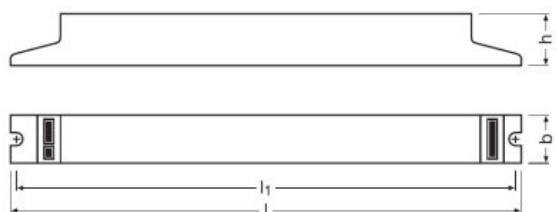

Length	280.0 mm
Width	30.0 mm
Height	21.0 mm
Mounting hole spacing, length	270.0 mm
Product weight	180.00 g

### Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Permitted rel. humidity during operation	5...85 % <sup>1)</sup>

<sup>1)</sup> Maximum 56 days/year at 85 %

## Product datasheet

### Lifespan

<b>ECG lifetime</b>	100000 h <sup>1)</sup>
---------------------	------------------------

<sup>1)</sup> At  $T_{case} = 65^{\circ}\text{C}$  at  $T_{point}$  / 10% failure rate

### Expected Lifetime

Product name	Lamp group				
QTP-OPTIMAL 1X18...40	HO 24 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	50	60	70
		Lifetime [h]	100000	100000	80000
	HO 39 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	55	60	70
		Lifetime [h]	100000	100000	80000
	L 18 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	50	60	70
		Lifetime [h]	100000	100000	90000
	L 30 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	50	60	70
		Lifetime [h]	100000	100000	80000
	L 36 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	55	60	70
		Lifetime [h]	100000	100000	80000

### Additional product data

<b>Suitable for lamp power (1 lamp)</b>	18...40 W
---	-----------

### Capabilities

<b>Suitable for fixtures with prot. class</b>	I / II
<b>End of lamp life safety shutdown</b>	EOL T.2
<b>Max. cable length to lamp/LED module</b>	2.0 m / 1.0 m
<b>Dimmable</b>	No

### Certificates & standards

<b>Approval marks – approval</b>	EL / VDE / ENEC 10 / VDE-EMC
<b>EEI – Energy Label</b>	A2
<b>Standards</b>	Acc. to IEC 61347-2-3 / App. J/Acc. to EN 55015:2006 + A1:2007 + A2:2009/Acc. to IEC 61000-3-2/EN 61000-3-2/Acc. to IEC 61547


## Product datasheet

Protection class	I
Type of protection	IP20

## Logistical data

Commodity code	850410809000
----------------	--------------


## Wiring Diagram

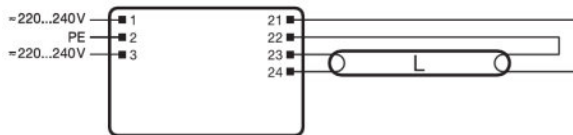

### QUICKTRONIC® PROFESSIONAL OPTIMAL

	QTP-OPTIMAL 1X18-40	QTP-OPTIMAL 1X18-40	QTP-OPTIMAL 1X18-40	QTP-OPTIMAL 1X18-40
18 W	17 x	12 x	12 x	8 x
18 W	8 1/2" x 11 1/2" x 46 mm	8 1/2" x 11 1/2" x 46 mm	8 1/2" x 11 1/2" x 46 mm	8 1/2" x 11 1/2" x 46 mm
18 W	20 x	18 x	18 x	15 x
18 W	8 1/2" x 11 1/2" x 46 mm	8 1/2" x 11 1/2" x 46 mm	8 1/2" x 11 1/2" x 46 mm	8 1/2" x 11 1/2" x 46 mm
18 W	< 24 A	< 37 A	< 37 A	< 37 A
18 W	230 µs	230 µs	230 µs	150 µs

#### QTP-OPTIMAL 1x..



Max. permitted cable length between ECG and lamp: 2.0 m (PN 21, 22), 1.8 m (PN 23, 24)

#### QTP-OPTIMAL 2x..



Max. permitted cable length between ECG and lamp: 2.8 m (PN 21, 22, 25, 26), 1.8 m (PN 23, 24)

① Max. Leitungslänge zwischen EVO und Lampe: Leitungslänge max.: Hauptlampe  
 ② Максимальная длина проводов между ЭВР и лампой  
 ③ Кабельная сеть имеет приоритетную поддержку интеллектуальных устройств

**OSRAM**

319638\_QTP5 1x..








590771\_EAC QTP-OPTIMAL

## Download Data

File
Addon Technical Information 502689_Frequent switching Quicktronic
Product Datasheet 502688_ECG lifetime - QUICKTRONIC non DIM
Certificates 592319_EAC certificate for Quicktronics QT
Certificates 349650_QTP-OPTIMAL VDE Certificate
Certificates 346505_ENEC QTP-Optimal

## Product datasheet

---

	Certificates 346506_EMQ QTP-Optimal
	Certificates 346512_CE QTP-Optimal
	Declarations of conformity Quicktronic CE 3364256 090421
	CAD data QTP OPTIMAL 1x18-40 IGS 250320
	CAD data QTP OPTIMAL 1x18-40 STEP 250320
	CAD Data 2-dim QTP OPTIMAL 1x18-40 CAD2PDF 250320
	CAD data 3-dim QTP OPTIMAL 1x18-40 CAD3PDF 250320

---

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321873743	QTP-OPTIMAL 1X18...40	Shipping carton box 20	312 mm x 166 mm x 98 mm	5.08 dm <sup>3</sup>	3506.00 g

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

## QTP-OPTIMAL 1X18...40

QUICKTRONIC PROFESSIONAL OPTIMAL | ECG for FL and CFL, not dimmable

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Power factor $\lambda$ [PIM]	Luminous flux at 35 °C	Number of lighting outlets	Luminous flux at 25 °C
QTP-OPTIMAL 1X18...40	DULUX F 18 W	0.08 A	18.00 W	0.90 c	1050 lm	1	
	DULUX F 24 W	0.12 A	25.00 W	0.95	1650 lm	1	
	DULUX F 36 W	0.15 A	34.00 W	0.98	2700 lm	1	
	DULUX L 18 W	0.09 A	19.00 W	0.90 c	1150 lm	1	
	DULUX L 24 W	0.12 A	27.00 W	0.95	1750 lm	1	
	DULUX L 36 W	0.16 A	35.00 W	0.98	2800 lm	1	
	DULUX L 40 W	0.20 A	44.00 W	0.98	3500 lm	1	
	HNS 16 4P SE						
	HNS 16W G5						
	HNS 20 4P SE						
	HNS-L 18W 2G11						
	HNS-L 24W 2G11						
	HO 24 W	0.13 A	28.00 W	0.98	1750 lm	1	
	HO 39 W	0.13 A	41.00 W	0.98	3100 lm	1	
	L 15 W	0.08 A	17.00 W	0.95	950 lm	1	
	L 18 W	0.10 A	20.00 W	0.95	1350 lm	1	
	L 23 W	0.14 A	31.10 W			1	1900 lm

## Product datasheet

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Power factor $\lambda$ [PIM]	Luminous flux at 35 °C	Number of lighting outlets	Luminous flux at 25 °C
	L 30 W	0.15 A	36.00 W	0.95	2850 lm	1	
	L 36 W -1	0.15 A	36.00 W	0.98	3100 lm	1	
	L 36 W	0.16 A	36.00 W	0.98	3200 lm	1	
	L 40 W C	0.18 A	41.10 W	0.98		1	1*3200 lm
	NS 11W G5						
	NS 15W G13						
	NS 30W G13						